

TCC160

Asynchronous Full-Color LED Display Control Card



Specifications

Change History

| Document Version | Release Date | Description |
|------------------|--------------|--|
| V1.0.5 | 2025-04-27 | Updated the LED OUT connector description. |
| V1.0.4 | 2025-01-08 | <ul style="list-style-type: none">• Updated the playback performance.• Updated the media decoding specifications. |
| V1.0.3 | 2024-10-09 | <ul style="list-style-type: none">• Updated the certification information.• Updated the feature descriptions. |
| V1.0.2 | 2024-09-13 | Changed the maximum height of an ultra-long screen. |
| V1.0.1 | 2024-09-04 | Added receiving card features. |

Introduction

The TCC160 is an asynchronous full-color LED display control card from NovaStar. It integrates sending and receiving capabilities, allowing users to publish content and control LED displays with a computer, mobile phone, or tablet. Working with cloud-based publishing and monitoring platforms, the TCC160 enables users to manage LED displays from an Internet-connected device anywhere, anytime.

The TCC160 comes with 16 standard HUB75E connectors for communication. The hardware and software designs take into full consideration the on-site setup, operation and maintenance, making setup easier, operation more stable, and maintenance more efficient.

Thanks to its stable and secure integrated design, the TCC160 saves space, simplifies cabling, and is suitable for the applications requiring small pixel capacity, such as storefront displays, vehicle-mounted displays, displays in communities, and lamp-post displays.

Certifications

CE, FCC, RoHS

If the product does not have the relevant certifications required by the countries or regions where it is to be sold, please contact NovaStar to confirm or address the problem.

Otherwise, the customer shall be responsible for the legal risks caused or NovaStar has the right to claim compensation.

Features

Input and Output

- For PWM driver ICs, the maximum pixel capacity per TCC160 is 512×512@60Hz. For general driver ICs (including ICN1065 and ICN1063), the maximum pixel capacity per TCC160 is 512×384@60Hz.

Maximum width/height: 2048 pixels (maximum capacity per TCC160: 260,000 pixels)

- Maximum capacity when multiple TCC160 cascaded: 650,000 pixels

Maximum width/height: 2048 pixels (maximum capacity per Ethernet port: 650,000 pixels)

- Maximum width of an ultra-long screen: 8192 pixels, Maximum height of an ultra-long screen: 2048 pixels (maximum capacity per Ethernet port: 650,000 pixels)
- 1x Stereo audio output

Control

- 1x USB 2.0 (Type A) port allowing for upgrade, USB playback, storage expansion, and log export.
- 1x USB (Type B) port connecting to the control computer for content publishing and screen control.
- 2x RS485 ports connecting to the light sensor, temperature and humidity sensor, or other modules to implement corresponding functions.

Performance

- Powerful processing capacity
 - Industrial-grade processor
 - Quad-core 1.4 GHz processor
 - Hardware decoding of 4K videos
 - 2 GB of RAM
 - 32 GB of internal storage
- Flawless playback

Support for playback of 1x 4K, 3x 1080p, 8x 720p, 16x 480p, or 20x 360p videos

Functionality

- All-round control plans
 - Enables users to publish content and control screens from a computer, mobile phone, or tablet.
 - Allows users to publish content and control screens from anywhere, anytime.
 - Allows users to monitor screens from anywhere, anytime.
- Wi-Fi AP and Wi-Fi Sta can be turned on at the same time
 - Wi-Fi AP

User terminal devices can be connected to the built-in Wi-Fi hotspot of the TCC160. The default SSID is “AP+*Last 8 digits of SN*” and the default password is printed on the SSID label.
 - Wi-Fi Sta

Users can directly access the TCC160 and connect to the Internet via bridging.
- Ultra-long-screen content playback
- Synchronous playback across multiple screens

Enabling synchronous playback halves the decoding capability of the device.

 - NTP time synchronization
 - GPS time synchronization (The specified 4G module must be installed.)
- Support for 4G modules

The TCC160 ships without a 4G module. Users have to purchase 4G modules separately if needed.
- Support for GPS positioning and GPS time synchronization

This feature requires a 4G module and GPS antenna.
- Support for relays (maximum DC 30 V, 3 A)

Receiving Card Features

- Up to 32 groups of parallel RGB data or 64 groups of serial data (expandable to 128 groups of serial data)

- Color management

Supports Standard (Rec.709 / DCI-P3 / Rec.2020) and custom color gamuts, enabling more precise colors on the screen

- 18bit+

Improves the LED display grayscale by 4 times to avoid grayscale loss due to low brightness and allow for a smoother image.

- Low latency (This feature is turned off by default)

The latency of video source on the receiving card end can be reduced to 1 frame (only when using modules with driver IC with built-in RAM).

- Individual Gamma adjustment for RGB

Working with NovaLCT and the controller that supports this function, the receiving card supports individual adjustment to red gamma, green gamma and blue gamma, which can effectively control image non-uniformity at low grayscale conditions and white balance offset, allowing for a more realistic image.

- 90° Image rotation

The display image can be rotated in multiples of 90° (0°/90°/180°/270°).

- Display of three color 16 pixels serial input

Supports display of the three color 16 pixels serial input of PWM chips

- Temperature and voltage monitoring

Real-time monitoring of the temperature and voltage of the receiving card, without the need for other external devices.

- Bit error detection

The Ethernet port communication quality of the receiving card can be monitored and the number of erroneous packets can be recorded to help troubleshoot network communication problems.

- Firmware program readback

The receiving card firmware program can be read back and saved to the local storage.

- Configuration parameter readback

The receiving card configuration parameters can be read back and saved to the local storage.


- Mapping 1.1

The cabinets can display the controller number, receiving card number, and Ethernet port information, allowing users to easily obtain the locations and connection topology of receiving cards.

- Dual program backup

Two copies of firmware program are stored in the receiving card at the factory to avoid the problem that the receiving card may get stuck abnormally during program update.

Appearance

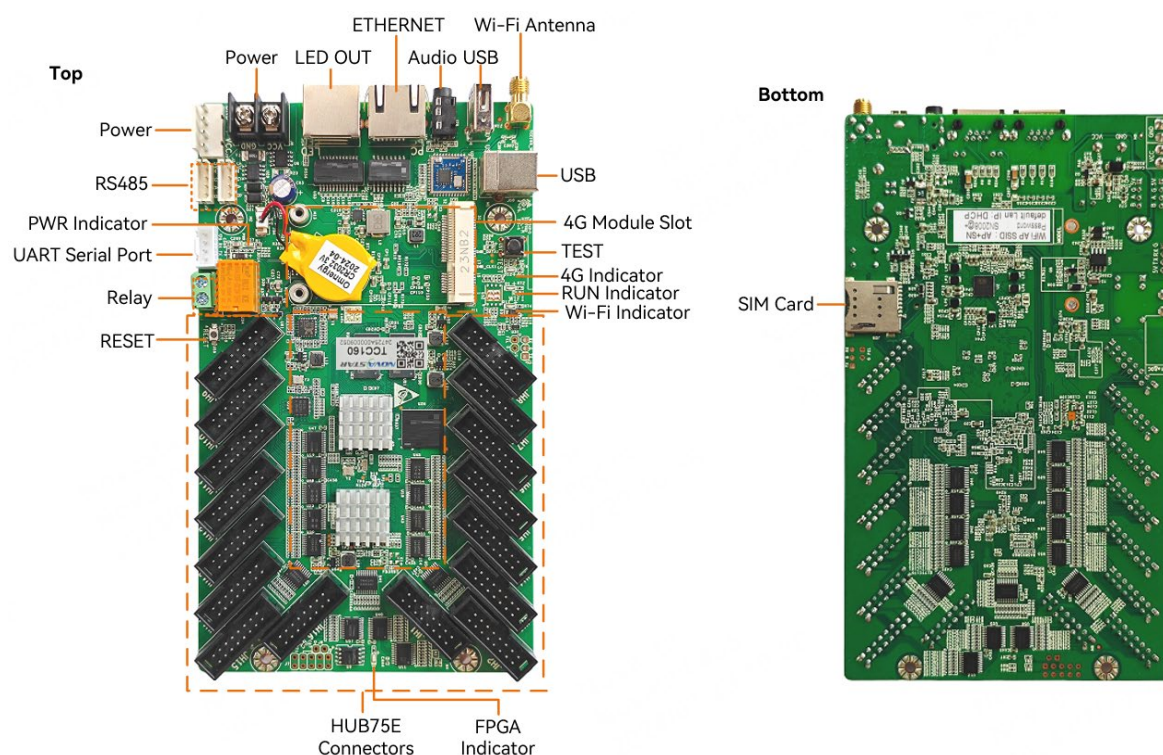

Note: All product pictures shown in this document are for illustration purpose only. Actual product may vary.

Table 5-1 Connectors and buttons

| Name | Description |
|---------|---|
| Power | Power input connector |
| LED OUT | Gigabit Ethernet port Standard RJ45 connector (with no built-in LEDs) for cascading receiving cards and connecting multifunction cards |


| Name | Description |
|-------------------|---|
| ETHERNET | Fast Ethernet port Standard RJ45 connector (with built-in LEDs) connecting to a network or control computer |
| Audio | Audio output connector OMTP headphones can be connected. |
| USB | <ul style="list-style-type: none">• 1x USB 2.0 (Type A) port allowing for upgrade, USB playback, storage expansion (up to 128 GB), and log import and export. Only the FAT32 file system is supported and the maximum size of a single file is 4 GB.• 1x USB (Type B) port connecting to the control computer for content publishing and screen control. |
| Wi-Fi Antenna | Wi-Fi antenna connector (2.4 GHz Wi-Fi supported) |
| SIM Card | SIM card slot Capable of preventing users from inserting a SIM card in the wrong orientation. |
| HUB75E Connectors | HUB75E connectors Connect to LED modules. |
| Relay | 2-pin relay control switch for remote screen control |
| UART Serial Port | Reserved port Connects to a third-party GPS module for positioning and time synchronization |
| RS485 | RS485 connectors Connect to light sensors, other sensors or modules to implement corresponding functions. |
| RESET | Factory reset button Press and hold this button for 5s to reset the device to the factory settings. |

Indicators

| Indicator | Color | Status | Description |
|-----------|-------|------------|---------------------------------------|
| PWR | Red | Staying on | The power supply is working properly. |
| 4G | Green | Staying on | The network connection and device |

| Indicator | Color | Status | Description |
|-----------|-------|-----------------------------|--|
| | | | communication is normal. |
| | | Flashing once every second | The SIM card is abnormal. |
| | | Off | No 4G module is detected. |
| RUN | Green | Flashing once every 2s | The system is functioning normally. |
| | | Staying on/off | The system is malfunctioning. |
| WiFi | Green | Staying on | Built-in Wi-Fi Sta is turned on, but no Wi-Fi network is connected. |
| | | Flashing once every 2s | Wi-Fi Sta is configured and a Wi-Fi network is connected successfully. |
| | | Off | Wi-Fi Sta is turned off. |
| FPGA | Green | Flashing once every second | The receiving card is working properly, the Ethernet cable connection is normal, and there is a video input. |
| | | Flashing 3 times every 0.5s | The Ethernet cable connection is normal but there is no video input. |
| | | Flashing once every 0.2s | Loading of the program in the application area fails and the backup program is working. |

Dimensions

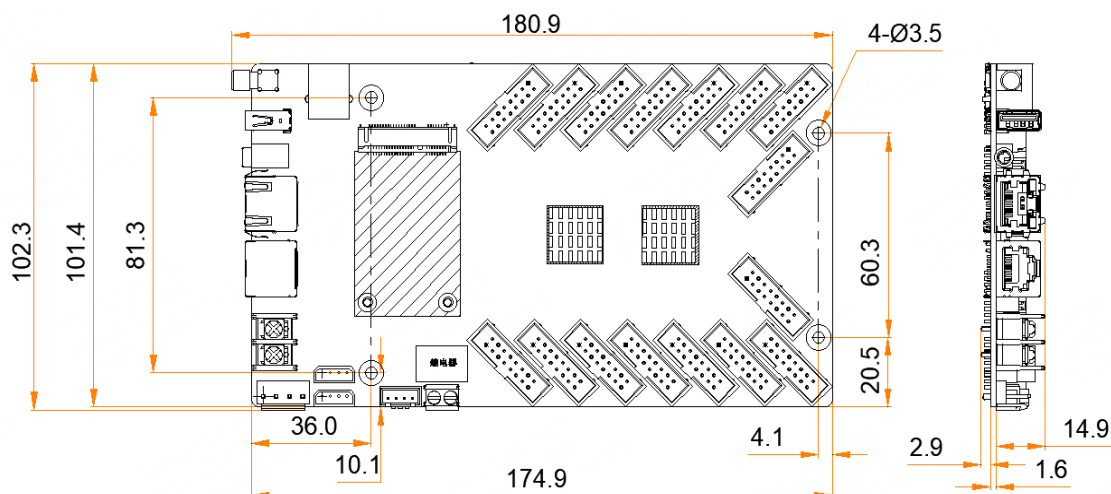

Tolerance: ± 0.3 Unit: mm

To make molds or trepan mounting holes, please contact NovaStar for a higher-precision structural drawing.

Specifications

| | | |
|-------------------------|---|---|
| Electrical Parameters | Input voltage | DC 5 V~12 V |
| | Maximum power consumption | 12 W |
| Storage Capacity | RAM | 2 GB |
| | Internal storage | 32 GB |
| Operating Environment | Temperature | -40°C to +80°C |
| | Humidity | 0% RH to 80% RH, non-condensing |
| Storage Environment | Temperature | -40°C to +80°C |
| | Humidity | 0% RH to 80% RH, non-condensing |
| Physical Specifications | Dimensions (L×W×H) | 180.9 mm×102.3 mm×19.4 mm |
| | Net weight | 149.6 g |
| | Gross weight | 348.6 g |
| Packing Information | Dimensions (L×W×H) | 278.0 mm × 218.0 mm × 63.0 mm |
| | List | <ul style="list-style-type: none"> • 1x TCC160 • 1x Omnidirectional Wi-Fi antenna • 1x Quick Start Guide • 1x Certificate of Approval |
| System Software | <ul style="list-style-type: none"> • Android 10 operating system software • Android terminal application software • FPGA program | |

The amount of power consumption may vary depending on various factors such as product settings, usage, and environment.

Media Decoding Specifications

Image

| Codec | Max Resolution | Format | Remarks |
|-------|------------------|--------|---------|
| BMP | 4096×2304 pixels | BMP | N/A |
| GIF | 4096×2304 pixels | GIF | N/A |
| JPG | 4096×2304 pixels | JPG | N/A |
| JPEG | 4096×2304 pixels | JPEG | N/A |
| PNG | 4096×2304 pixels | PNG | N/A |

Video

| Codec | Resolution | Frame Rate | Max Bit Rate (Ideal Case) | Format |
|--------|-------------------------------------|------------|------------------------------|-------------------------------|
| H.265 | 64×64 pixels to 4096×2304 pixels | 60fps | 100Mbps | MP4, AVI, RMVB, FLV, MKV, MOV |
| H.264 | 64×64 pixels to 4096×2304 pixels | 30fps | 60Mbps | MP4, AVI, RMVB, FLV, MKV, MOV |
| MPEG-4 | 64×64 pixels to 1920×1088 pixels | 60fps | 29Mbps | MP4, AVI, RMVB, FLV, MKV, MOV |
| VP9 | 64×64 pixels to 4096×2304 pixels | 30fps | 49Mbps | MP4, AVI, RMVB, FLV, MKV, MOV |
| MJPEG | 64×64 pixels to 1920×1088 pixels | 22fps | 6Mbps | MP4, AVI, RMVB, FLV, MKV, MOV |
| AVS2 | 64×64 pixels to 3840×2160 pixels | 25fps | 20Mbps | MP4, AVI, RMVB, FLV, MKV, MOV |
| H.263 | 64×64 pixels to 1920×1088 pixels | 60fps | 60Mbps | MP4, AVI, RMVB, FLV, MKV, MOV |
| VP8 | 64×64 pixels to 1920×1088 pixels | 60fps | 60Mbps | MP4, AVI, RMVB, FLV, MKV, MOV |
| MPEG-2 | 64×64 pixels to | 60fps | 60Mbps | MP4, AVI, RMVB, FLV, MKV, MOV |

| Codec | Resolution | Frame Rate | Max Bit Rate (Ideal Case) | Format |
|-------------------|-------------------------------------|------------|------------------------------|-------------------------------|
| | 1920×1088 pixels | | | |
| MPEG-1 | 64×64 pixels to 1920×1088 pixels | 60fps | 60Mbps | MP4, AVI, RMVB, FLV, MKV, MOV |
| VC-1 | 64×64 pixels to 1920×1088 pixels | 60fps | 60Mbps | MP4, AVI, RMVB, FLV, MKV, MOV |
| Sorenson Spark | 64×64 pixels to 1920×1088 pixels | 60fps | 60Mbps | MP4, AVI, RMVB, FLV, MKV, MOV |
| CAVS | 64×64 pixels to 1920×1088 pixels | 60fps | 30Mbps | MP4, AVI, RMVB, FLV, MKV, MOV |

Notes and Cautions

FCC Caution

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: this equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.

- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Radiation Exposure Statement

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20 cm between the radiator and your body.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

Country Code selection feature to be disabled for products marketed to the US/Canada.

- The antenna must be installed such that 20 cm is maintained between the antenna and users, and
- The transmitter module may not be co-located with any other transmitter or antenna.

As long as the three conditions above are met, further transmitter testing will not be required. However, the OEM integrator is still responsible for testing their end-product for any additional compliance requirements required with this module installed.

Copyright

Copyright © 2025 Xi'an NovaStar Tech Co., Ltd. All Rights Reserved.

No part of this document may be copied, reproduced, extracted or transmitted in any form or by any means without the prior written consent of Xi'an NovaStar Tech Co., Ltd.

Trademark

 is a trademark of Xi'an NovaStar Tech Co., Ltd.

Statement

Thank you for choosing NovaStar's product. This document is intended to help you understand and use the product. For accuracy and reliability, NovaStar may make improvements and/or changes to this document at any time and without notice. If you experience any problems in use or have any suggestions, please contact us via the contact information given in this document. We will do our best to solve any issues, as well as evaluate and implement any suggestions.

| Official website
| www.novastar.tech

| Technical support
| support@novastar.tech